

Gorgiel ... in warm atmosphere



FIGIL VS

INFORMATION CARD

PREMIUM LINE

KEY FEATURES



- Easy assembly.
- No visible brackets.
- Original and esthetic design
- Available version with golden oak - finish [50] presented on picture
- Guaranteed high quality




Supplied as standard in white [01] with type 50 mm connection type [21]. The valves shown in the photo are optional accessories available at an additional cost.

SEE RECOMMENDED ACCESSORIES

Type:	AFi VS - decorative radiator
Material:	Low carbon steel, unalloyed
Construction:	Pipe Ø 20 Collector profile D 40 x 30
Work pressure:	Up to 1,0 MPa (10 bar)
Work temperature:	Up to 95°C
Standard equipmen:	Plug ½" Air vent ½" Radiator bracket type Z 13
Surface finishing:	Colour white [01]
Connection:	½"


	STANDARD
Connection diagram	[M] 
Connection code	4  4
	2 - air vent ½" 3 - plug ½"

RECOMMENDED ACCESSORIES


	<p>DOUBLE VALVE</p> <p>For connection type [21] a combined double valve with a thermostatic head both in the color of the radiator.</p>
---	---

FIGIL VS

Figil VS	Height	Width	Depth	Connection	Heat output		Product	version
	H [mm]	W [mm]	D [mm]	M [mm]	55/45/20°C	75/65/20°C	INDEKS	CODE
AFI VS 155/50	1540	510	85	50	356	679	10115143802	101
AFI VS 170/50	1740	510	85	50	400	763	10115143812	101
AFI VS 155/60	1540	610	85	50	423	805	10115143822	101
AFI VS 170/60	1740	610	85	50	476	904	10115143832	101

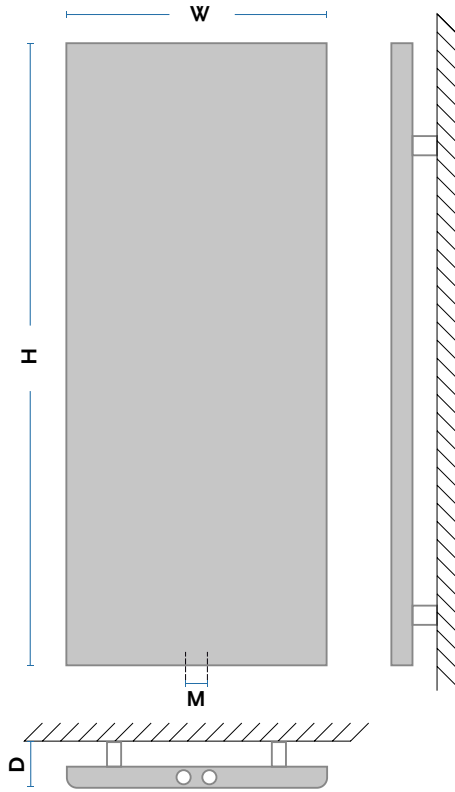

H - Height; W - Width; D - Depth; M - Connection spacing;

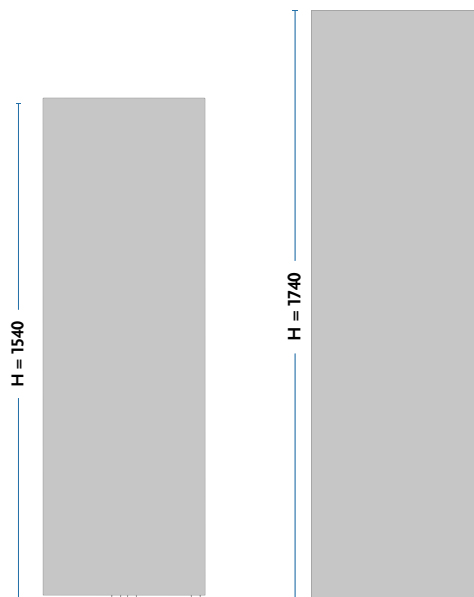




GORGIEL GROUP Sp. z o.o. Sp.k.

Karpicko, 64-200 Wolsztyn
ul. Poznańska 10

tel. +48 68 347 54 00
fax + 48 68 347 54 50
gorgiel@gorgiel.com.pl



gorgiel.pl