



R PT ZS |

Brass manifold with flow meters, thermostatic valves and a tee

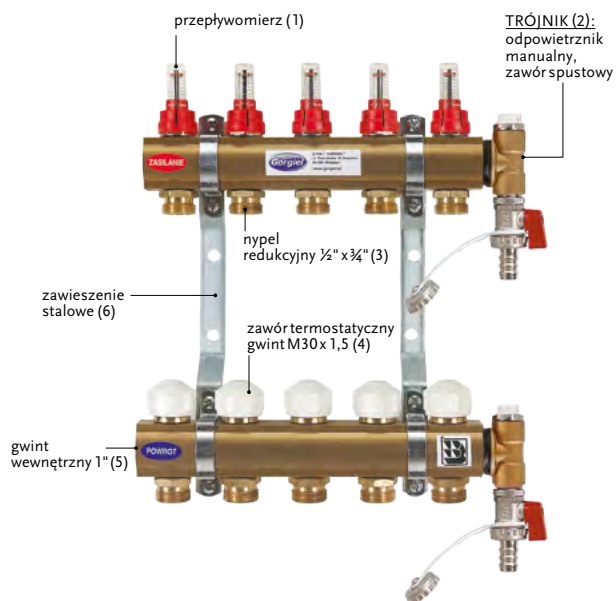

Material:	Brass
Construction:	Profile C
Operating temperature:	Up to 70°C
Working pressure:	Up to 0,6 MPa
Warranty:	10 years for beam tightness 2 years equipment and O-ring seals
Recommended use:	Underfloor heating in central heating installations

- Flow meter (rotameter)
 - provides quick and accurate flow regulation
 - flow rate in l / min (0,5 - 5,0 l/min)
 - possibility of securing
- Tee pipe with air vent and drain valve
- Brass connector 1/2" x 3/4"
- Thermostatic valve insert (thread M30 x 1,5)
 - independent temperature control on individual circuits
- Internal thread 1"
 - for connecting the central heating installation
- Steel brackets

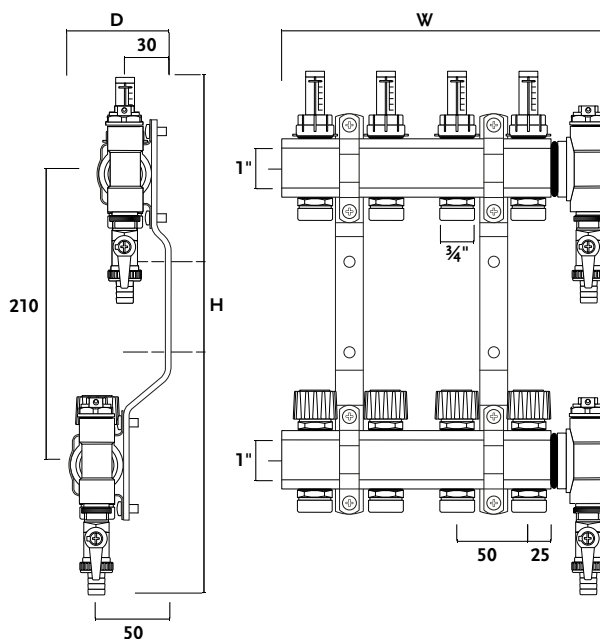

Type	Section no.	Width [W] mm	Height [H] mm	Depth [D] mm	Indeks
R PT ZS 2	2	150	380	75	1041123402
R PT ZS 3	3	200	380	75	1041123403
R PT ZS 4	4	250	380	75	1041123404
R PT ZS 5	5	300	380	75	1041123405
R PT ZS 6	6	350	380	75	1041123406
R PT ZS 7	7	400	380	75	1041123407
R PT ZS 8	8	450	380	75	1041123408
R PT ZS 9	9	500	380	75	1041123409
R PT ZS 10	10	550	380	75	1041123410
R PT ZS 11	11	600	380	75	1041123411
R PT ZS 12	12	650	380	75	1041123412