



R ZT | Brass manifold with thermostatic valves and regulation valves

Material:	Brass
Construction:	Profile C
Operating temperature:	Up to 70°C
Working pressure:	Up to 0,6 MPa
Warranty:	10 years for beam tightness 2 years equipment and O-ring seals
Recommended use:	Underfloor heating in central heating installations

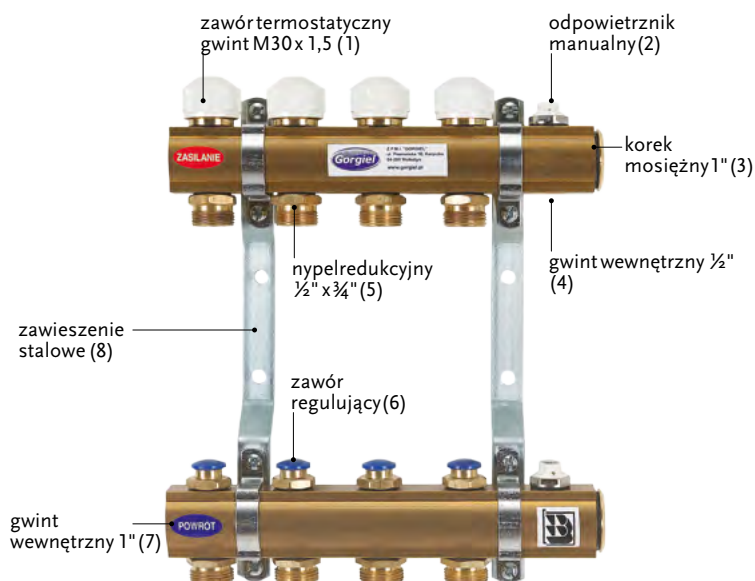

1. Thermostatic valve insert
- enables the installation of electrothermal actuators
- temperature control on individual circuits
2. Manual air vent 1/2"
3. 1" Brass plug with O-ring seal
4. Internal thread 1/2"
5. Brass Connector 1/2" x 3/4"
6. Regulating valves
7. Internal thread 1"
- for connecting the central heating installation
8. Steel brackets

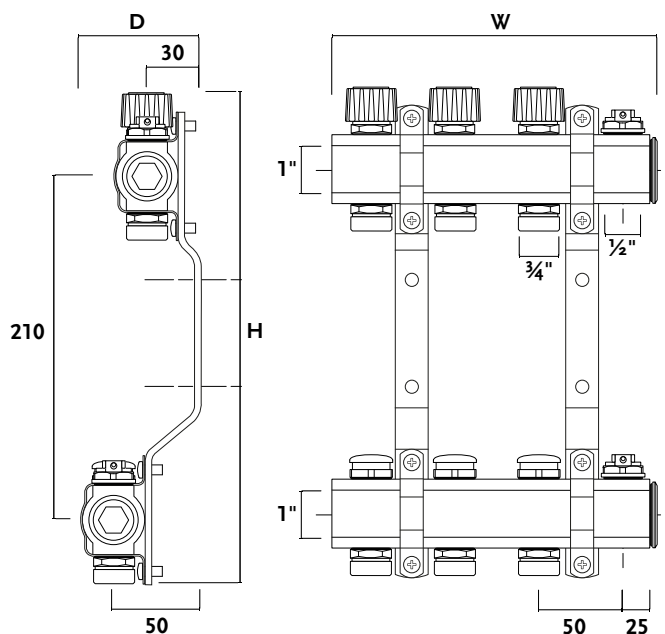

Type	Section no.	Width [W] mm	Height [H] mm	Depth [D] mm	Indeks
R ZT 2	2	155	325	75	1041122510
R ZT 3	3	205	325	75	1041122515
R ZT 4	4	255	325	75	1041122520
R ZT 5	5	305	325	75	1041122525
R ZT 6	6	355	325	75	1041122530
R ZT 7	7	405	325	75	1041122535
R ZT 8	8	455	325	75	1041122540
R ZT 9	9	505	325	75	1041122545
R ZT 10	10	555	325	75	1041122550
R ZT 11	11	605	325	75	1041122555
R ZT 12	12	655	325	75	1041122560
R ZT 13	13	705	325	75	1041122565
R ZT 14	14	755	325	75	1041122570