

Gorgiel ... in warm atmosphere



RECTA/R

INFORMATION CARD

PREMIUM LINE





KEY FEATURES

- Easy to mount
- Performance
- Perfect for any bathroom
- Original and aesthetic combination of square profiles
- Central connection 50 mm
- Dedicated connection for an electric heater
- The heater complies with the EN 442 standard
- Guaranteed high quality




Supplied as standard in white [01] with type [71] connection. The valves shown in the photo are optional accessories available at an additional cost.


Type:	ARE/R - bathroom radiator
Material:	Low carbon steel, unalloyed
Construction:	Profile 20 x 20 Collector profile 35 x 35
Work pressure:	Up to 1,0 MPa (10 bar)
Work temperature:	Up to 95°C
Standard equipment:	Premium plug ½" Premium air vent ½" Radiator bracket type Z 20
Surface finish:	Standard color white [01]
Connection:	½"

	STANDARD
Connection diagram	[M]  
Connection code	 
	2 - air vent ½" 4 - ½" plug fitted as standard, possible installing an electric heater

RECTA\R	H [mm]	W [mm]	D [mm]	M [mm]	55/45/20°C [W]	75/65/20°C [W]	90/70/20°C [W]	INDEKS	[kg]	[dm ³]
ARE\R 75/55	760	535	75	50	214	405	508	10115142747101	8,77	3,45
ARE\R 100/55	1005	535	75	50	280	530	665	10115142757101	11,84	4,71
ARE\R 125/55	1250	535	75	50	345	655	823	10115142767101	14,26	5,68
ARE\R 145/55	1460	535	75	50	402	763	959	10115142777101	16,89	6,75
ARE\R 175/55	1775	535	75	50	488	927	1166	10115142787101	20,18	8,08

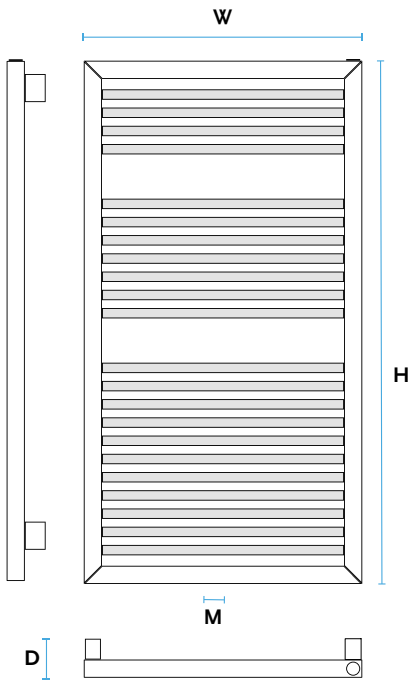

H - height; W - width; D - depth;
M - connection spacing;

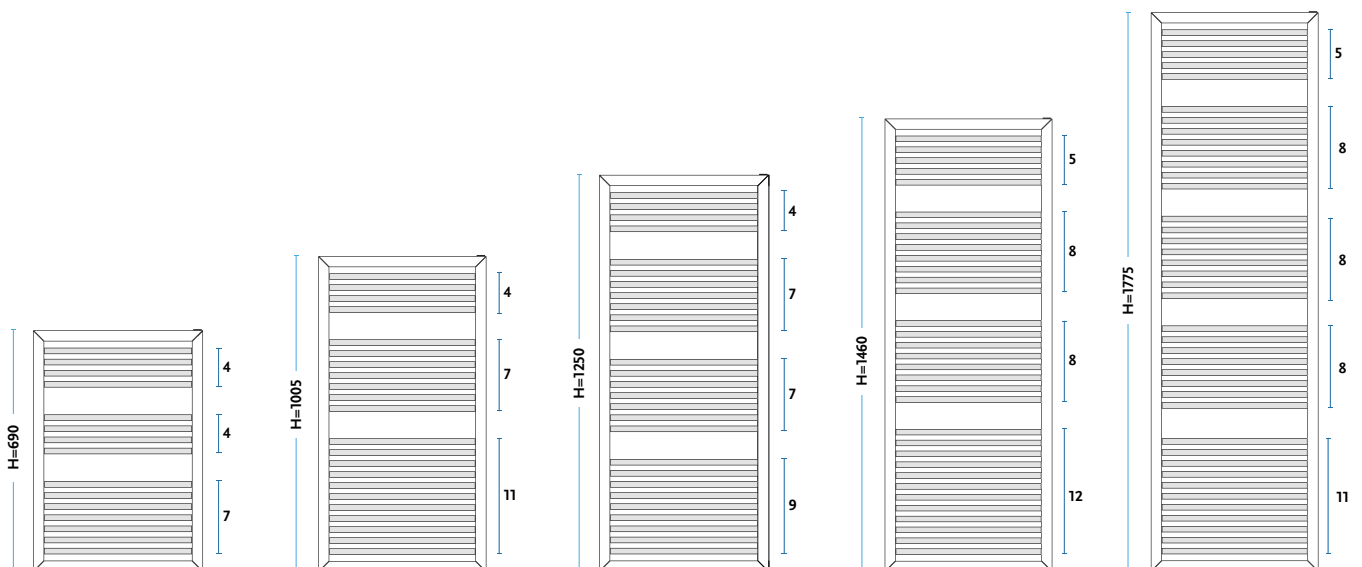



GORGIEL GROUP Sp. zo.o. Sp.k.

Karpicko, 64-200 Wolsztyn
ul. Poznańska 10

tel. +48 68 347 54 00
fax + 48 68 347 54 50
gorgiel@gorgiel.com.pl



gorgiel.pl